






1

2

3

4

5

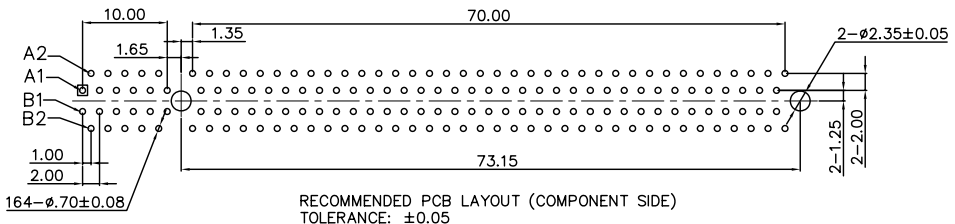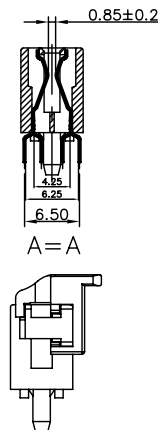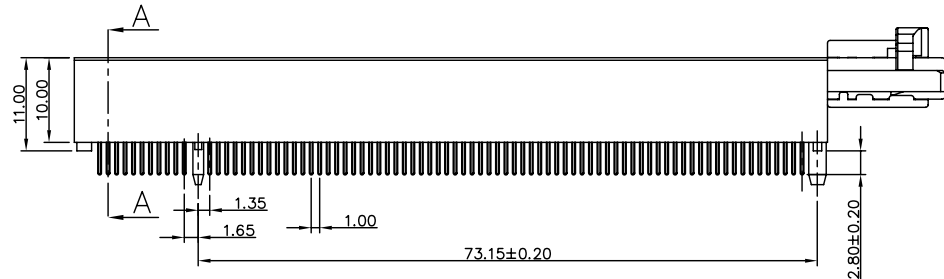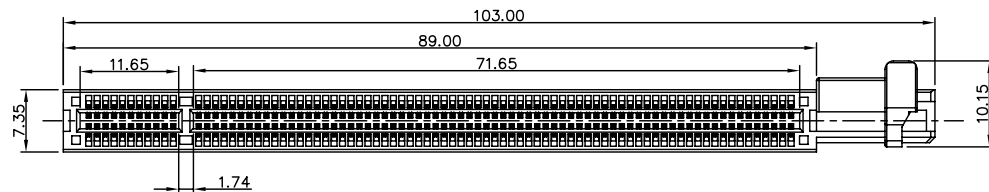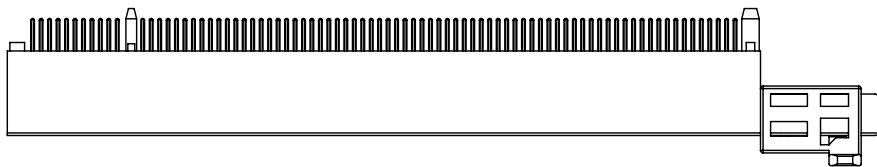

Electric Specifications  
 Current Rating:3.0Amps  
 Rating Voltage: 250V AC  
 Insulation Resistance:100M Ohm Min At DC 500V  
 Contact Resistance:30m Ohm Max At DC 100m Amps  
 Withstanding Voltage:1 Minute At 750V r.m.s Min  
 Temperature Range:-40°C~85°C

Materials:  
 Insulator:High Temp. Plastic (Nylon 66 UL94V-0)  
 Plativ Ear:Nylon 66 Coloeer ;White  
 Insulator Color:Balck  
 Terminal :Copper Alloy  
 Plating:Selective Gold Plated

How To Order  
 PCIEV10-164GX-RK-XX  
 Blank :Black RD:Red BU:Blue  
 Right Key  
 Blank:Selective Gold Plated  
 G3:Selective Gold Plated 3u"  
 G15:Selective Gold Plated 15u"  
 G30:Selective Gold Plated 30u"  
 No.of Positions  
 Straight Dip Type

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)  
 TOLERANCE: ±0.05

RoHS Compliant

				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: PCI-E 164 Connector Straight Dlp Type Right Key	SIZE <b>A4</b>
E				CHECKED: Jeremy Liu	UNIT: MM SCALE:2:1			
D				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: PCIEV10-164GX-RK-XX		
C								
B								
A	20-Apr-2020	(PC0001)	WGL					
REV	DATE	FILE	BY					